




Shelter Shutters™

FLAT DOORS WITH "OFF CENTER" GLASS
(flat door means NO raised molding around the glass)

Date _____
Page ____ of ____
Measured By _____
Phone _____ Ext _____

Door pump

The dark grey shaded area represents the stack back or installed section of the shutter when in the open position. The light grey depicts the working section of the shutter when closed across the glass

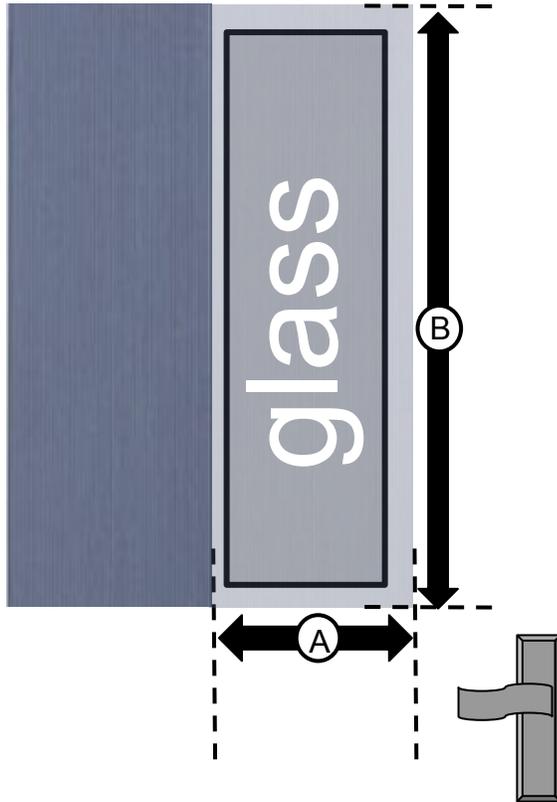

If your "off center" door glass has a raised steel or wood molding around the glass
do not use this form.
Use Type #1

A. Shutter Width _____"
Measure the glass only and add about 3" for shutter width. (enough for strike plate placement)

Example... 6" glass width + 3" total overlap = 9" Shutter Width

B. Shutter Length _____"
Measure the glass only and add 3" for shutter length if space permits

Example... 32" glass length + 3" total overlap = 35" Shutter Length

C. Door Width _____"

Is the door steel? Yes ___ No ___
(check one)

Qty. of Identical Doors _____

*Shelter Shutters are reversible.
The same shutter can be used for a door that opens left or right.*

If the door pump on top or door handle or panic bar on bottom or to the side seems to interfere with the top, side or bottom of the glass please send a photo or make notes below and sketch obstruction into this drawing.

Notes _____

School Name _____
Street _____
City _____
State _____ Zip _____
Contact Name _____
Phone _____ Ext _____
Email _____

Optional
Facilities Director _____
Phone _____ Ext _____

Safety Officer or Police in Charge
Name _____
Phone _____ Ext _____