

320



320





Shelter Shutters™

DOOR WITH RAISED WINDOW MOLDING & "OFF CENTER" GLASS

Date _____
 Page ____ of ____
 Measured By _____
 Phone _____ Ext _____

Door pump

The dark grey shaded area represents the stack back or installed section of the shutter when in the open position. The light grey depicts the working section of the shutter when closed across the glass

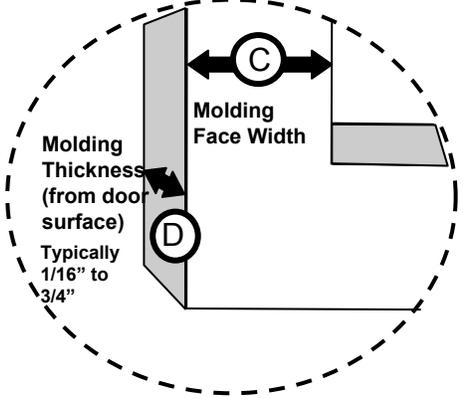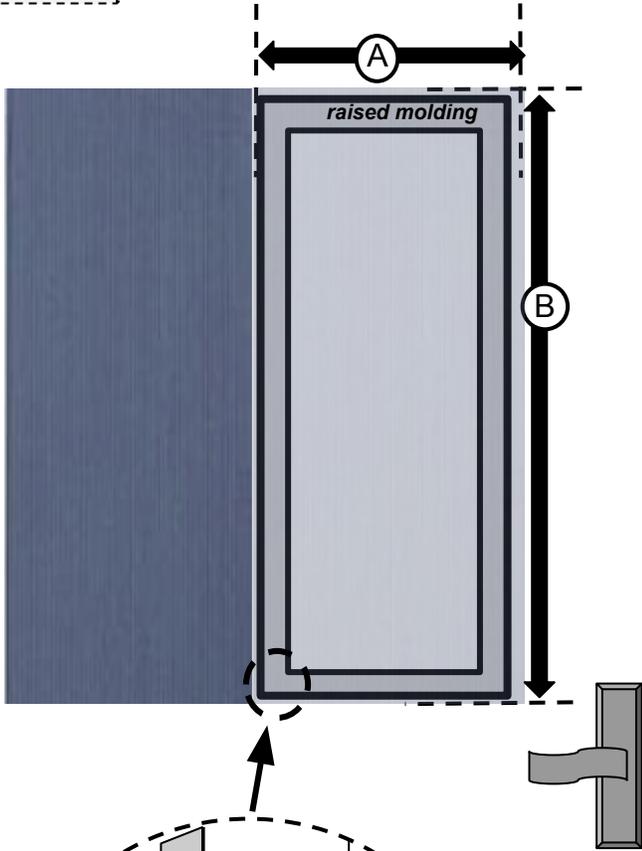

If your off center door glass does not have a raised molding around the glass
do not use this form.
 Use Type #2

- A. Shutter Width _____"
measure to cover the entire molding (dotted line to dotted line)
 - B. Shutter Length _____"
measure to cover the entire molding (dotted line to dotted line)
 - C. Molding Face Width _____"
 - D. Molding Thickness _____"
from door surface typically 1/16" to 3/4"
- Is molding around the glass made of steel? Yes ___ No ___
 (check one)
- E. Door Width _____"

Qty. of Identical Doors _____

*Shelter Shutters are reversible.
 The same shutter can be used for a door that opens left or right.*

If the door pump on top or door handle or panic bar on bottom or to the side seems to interfere with the glass please send a photo or make notes below and sketch obstruction into this drawing.

Notes _____

School Name _____
 Street _____
 City _____
 State _____ Zip _____
 Contact Name _____
 Phone _____ Ext _____
 Email _____

Optional

Facilities Director _____
 Phone _____ Ext _____

Safety Officer or Police in Charge
 Name _____
 Phone _____ Ext _____